

WATERPROOF FLOORING



ROCKO Flooring by Kronospan

04	product range
08	characteristics
10	collection flooring
10	1210 x 295 x 5 mm
28	1210 x 234 x 5 mm
38	1210 x 192 x 5 mm
66	skirtings
68	accessories
70	installation

_ 2 _

Decor overview



Collection	Thickenss	Utilization class	Residential Guarantee*	Locking System	V-Groove	Waterproof	Floor heating	Sound Insulation	Slide resistant	SKU's Total
1210 x 192	5+1 mm	34	30 YEARS	1clic 2go pure	4	••	<u> </u>	Perfect Pad®	*	8
1210 x 295	5 mm	34	30°	1clic 2go pure	4	••	<u>:::</u>	-	*	8
1210 x 234	5 mm	34	30 YEARS	1clic 2go pure	4	••	<u> </u>	-	*	4
1210 x 192	5 mm	34	30°	1clic 2go pure	4	••	<u>:::</u>	-	*	12

 $^{^{\}star}$ The guarantee is valid for domestic use acc. to the conditions of guarantee (detailed terms of guarantee: www.rocko-spc.com)

Waterproof flooring with superior performance

Innovative SPC floors with seamless design

Waterproof Rocko Flooring, made of over 70% of mineral core, finished with high-quality UV coating, is an outstanding material for domestic and commercial use, both in new projects and renovations.

Appearance of natural wood and stone

Rocko Flooring designs are digitally printed, reflecting down to the smallest detail the rich grain of wood and roughness of stones and concrete.

Cooridinated solution

Our Rocko Flooring range comes with complementary accessories: waterproof flooring, skirting boards, underlay and cleaning liquid, for coordinated solution. All materials are produced and shipped from Europe, available in express program.

Ensured stability

Rocko Flooring range is set apart from other types of vinyl flooring by its uniqe resilient core, which provides an incredibly stable base for each flooring plank and ensures dimensional stability.

Utility class

Due to its parameters, Rocko Flooring is characterized by highest utility classes. It can be used in intensively used domestic areas as corridor or kitchen, as well as in commercial spaces with high traffic, such as offices.



For intensively used living areas



For flooring subject to intensive use in commercial premises

















Decors






4 _ 5 _

PerfectPad®


Pre-attached pad, perfectly fitted to panel surface with no gaps in padding. Allows to eliminate preliminary step of rolling out separate underlayment.

Available in chosen Rocko Flooring designs.

Rocko Flooring with Perfect Pad.

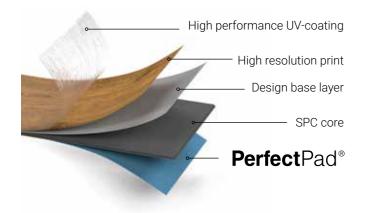


Rocko Flooring without pad.

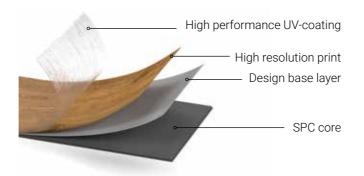





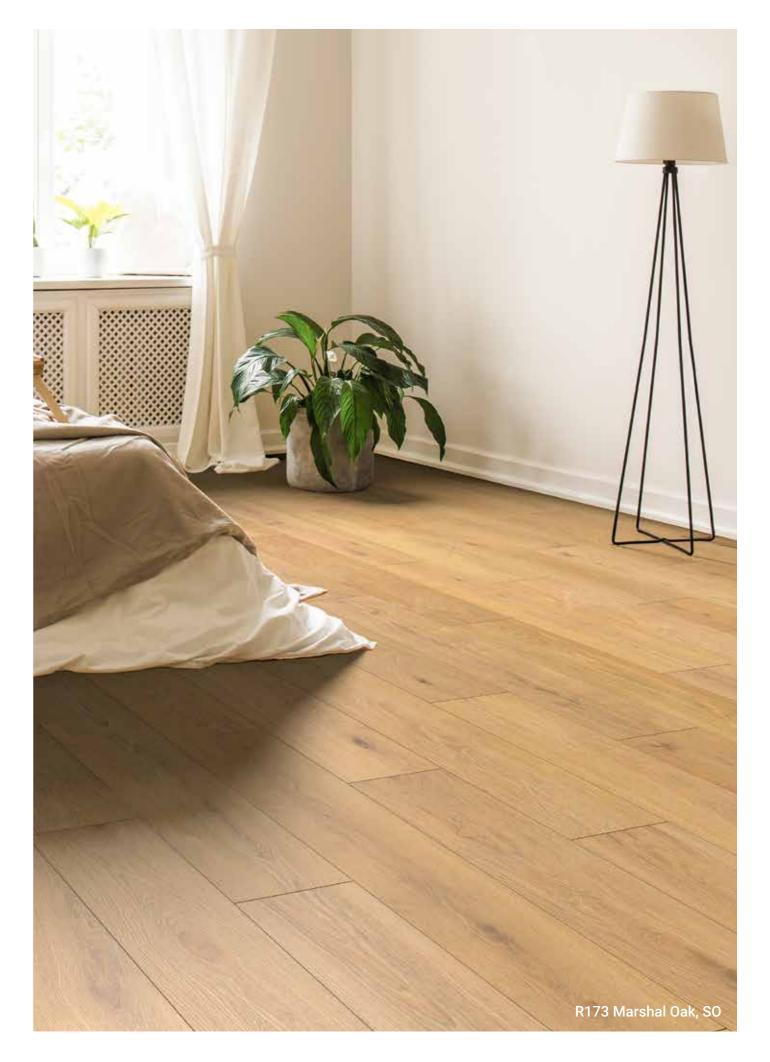

__ 6 __

Characteristics



Waterproof

Rocko Flooring is suitable for indoor use in dry and humid conditions, such as bathroom, laundry room, kitchen or vestibule.



Stain proof and easy to clean

Rocko Flooring meets stain resistance requirements, which might be caused by most common substances used in your living space: coffee, tea, wine, cleaning agents used in kitchen, laundry, and care products.



4-sided V-groove

Real v-groove on 4 sides of each plank.



Dimensionally stable

Rocko Flooring does not change its dimensions under the influence of temperature and humidity changes, so it can be used in sunny areas as well as in dry and humid ones.



Scratch resistant

Rocko Flooring is well-protected against fine scratches and everyday wear and tear thanks to durable top surface layer.



Soft touch

Rocko Flooring has a soft, pleasant surface and feels very comfortable, also barefoot.



Up to 60 panels per design

Up to 60 different panels per design and authentic appearance of wood and stones thanks to digital print technology.



1clic 2go pure - fast, clean and easy

Rocko Flooring installation system was specifically designed to make fitting of flooring as easy and hassle free as possible. The click profiles allow individual panels to be joined together quickly with minimal tools or complications.



_ 8 _



Collection

1210 x 295 x 5 mm

class 34





Concrete

Peetah texture, **1210 x 295 x 5** mm







White Poppy







Mornel





Salem Oak

Flanders Oak texture, 1210 x 295 x 5 mm





R128

Ascot





Nutmeg







Clove







R149

Brown Marten





Collection **1210 x 234 x 5 mm**

class 34





Clamshell







Vigra Oak

Flanders Oak texture, 1210 x 234 x 5 mm,





Sculpta

Hickory Scrape texture, 1210 x 234 x 5 mm








Brenton





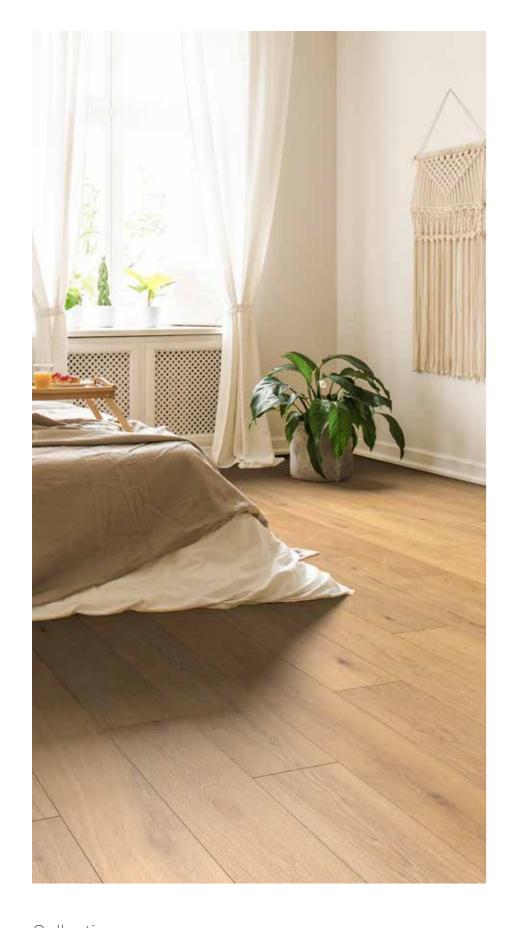

Collection **1210 x 192 x 5 mm**

class 34





Salt Mine










Hickory Scrape texture, 1210 x 192 x 5 mm



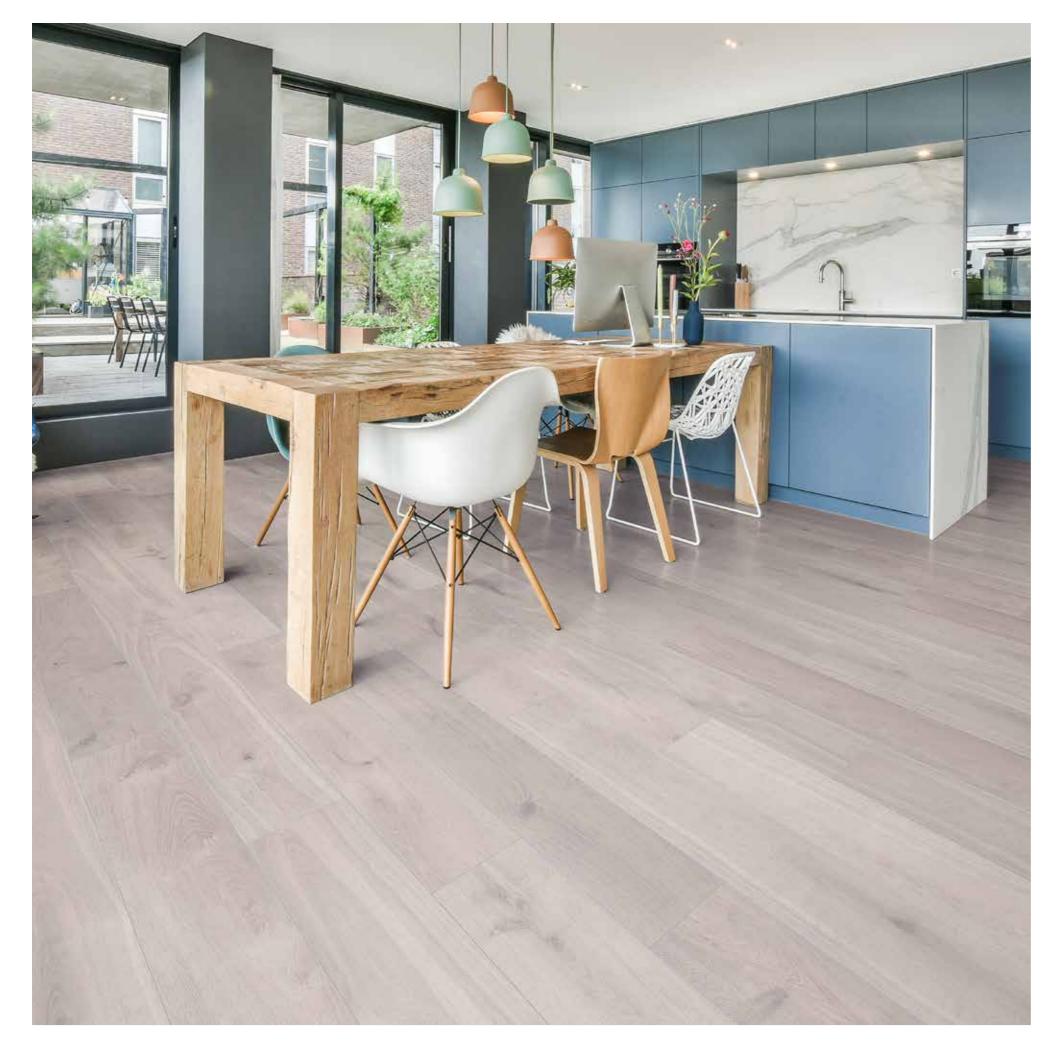






Hickory Scrape texture, 1210 x 192 x 5 mm



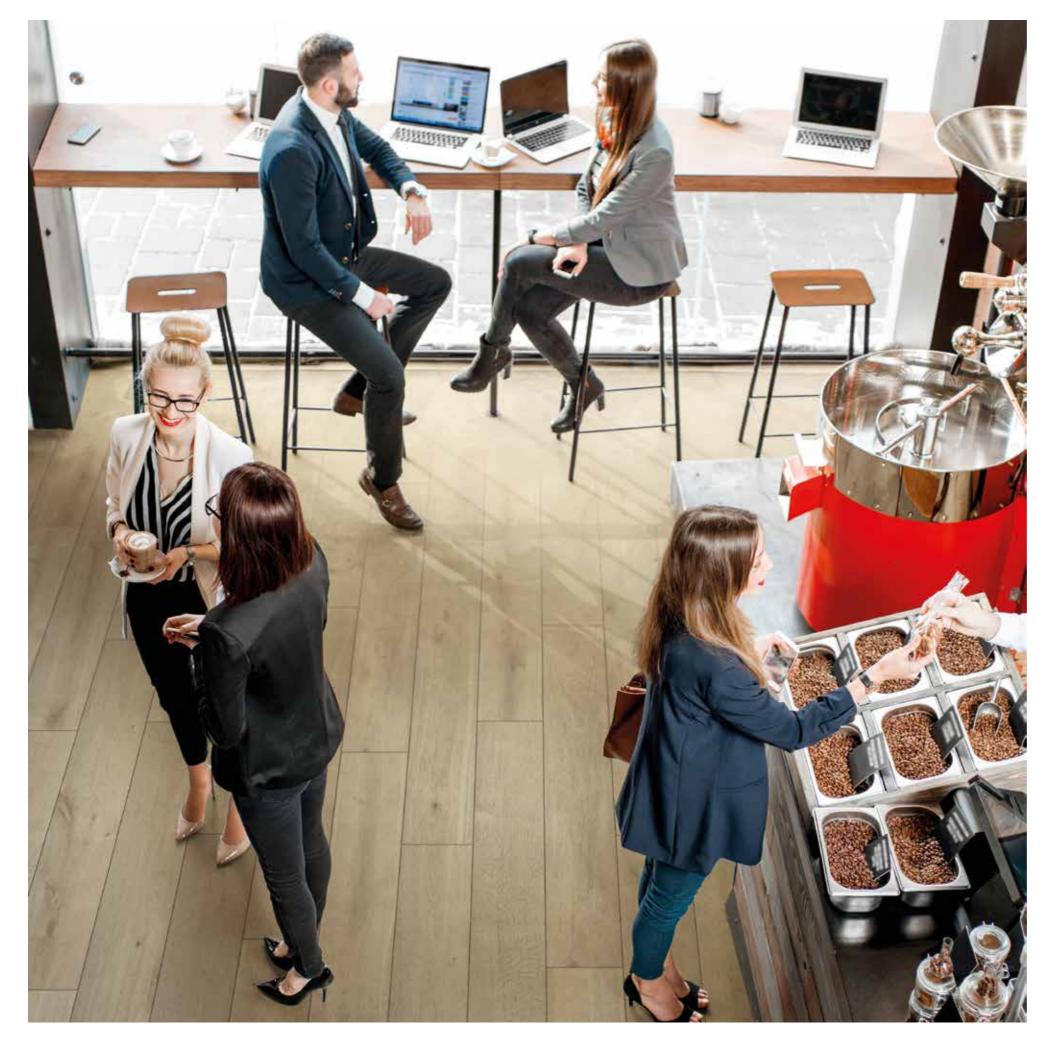



Rope

Hickory Scrape texture, 1210 x 192 x 5 mm










Hickory Scrape texture, 1210 x 192 x 5 mm



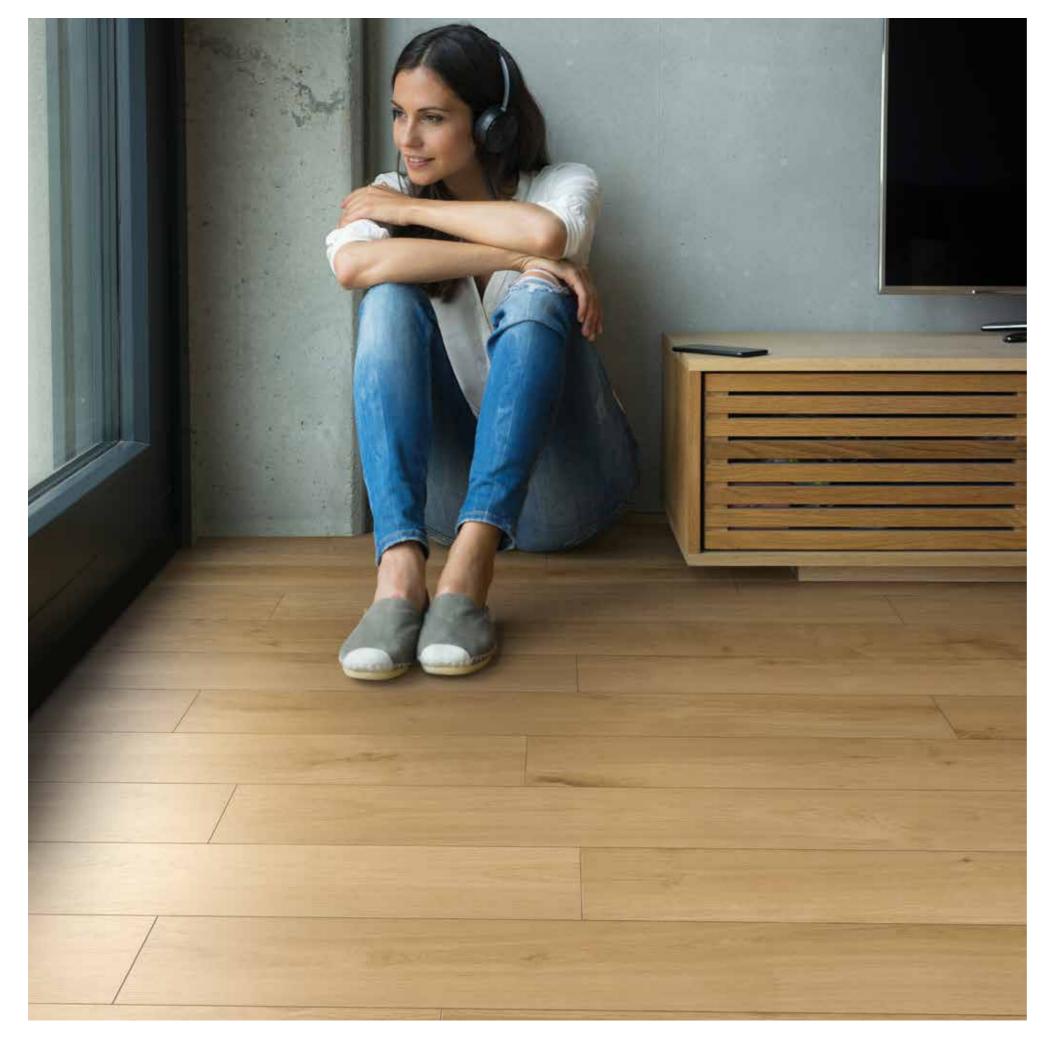



Marshal Oak






Crescendo

Hickory Scrape texture, 1210 x 192 x 5 mm



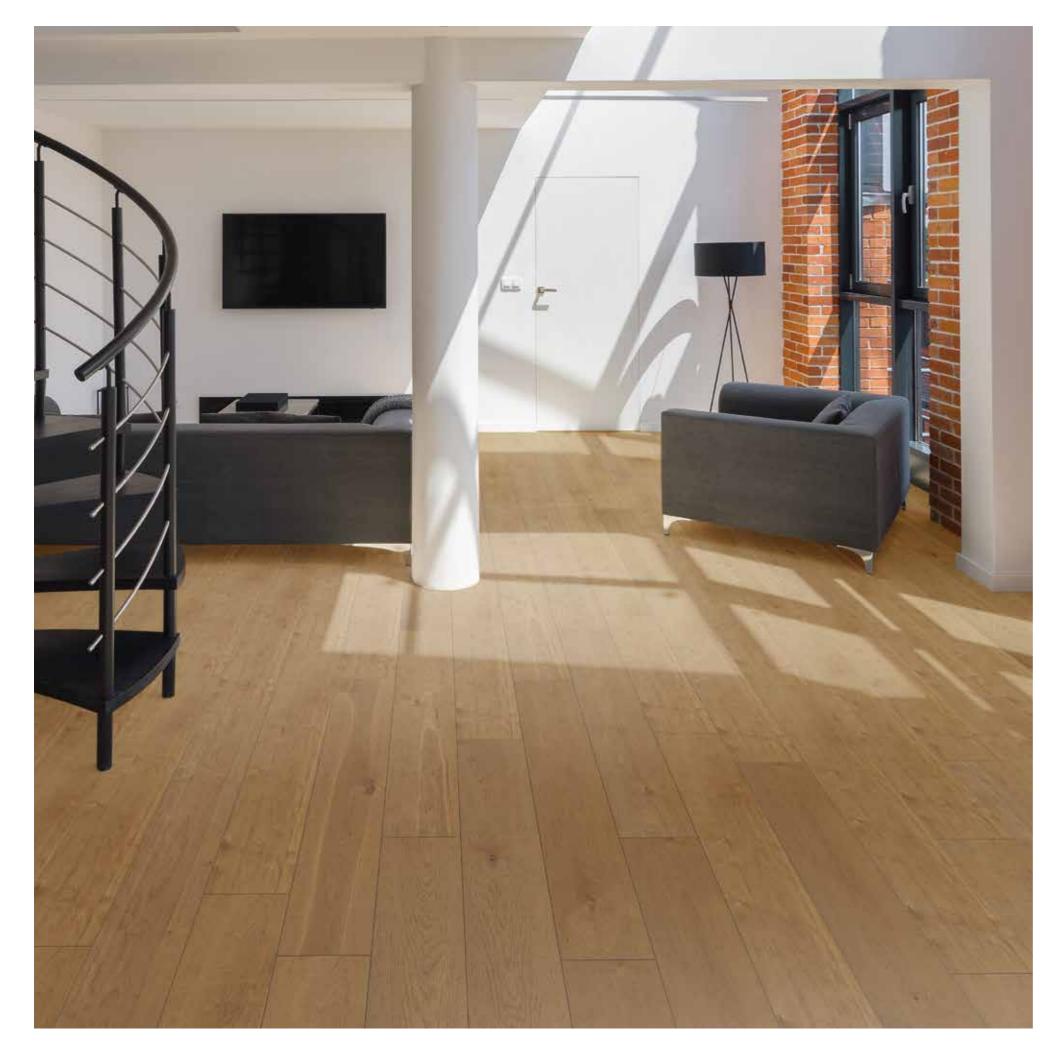




Sienna

Flanders Oak texture, 1210 x 192 x 5 mm



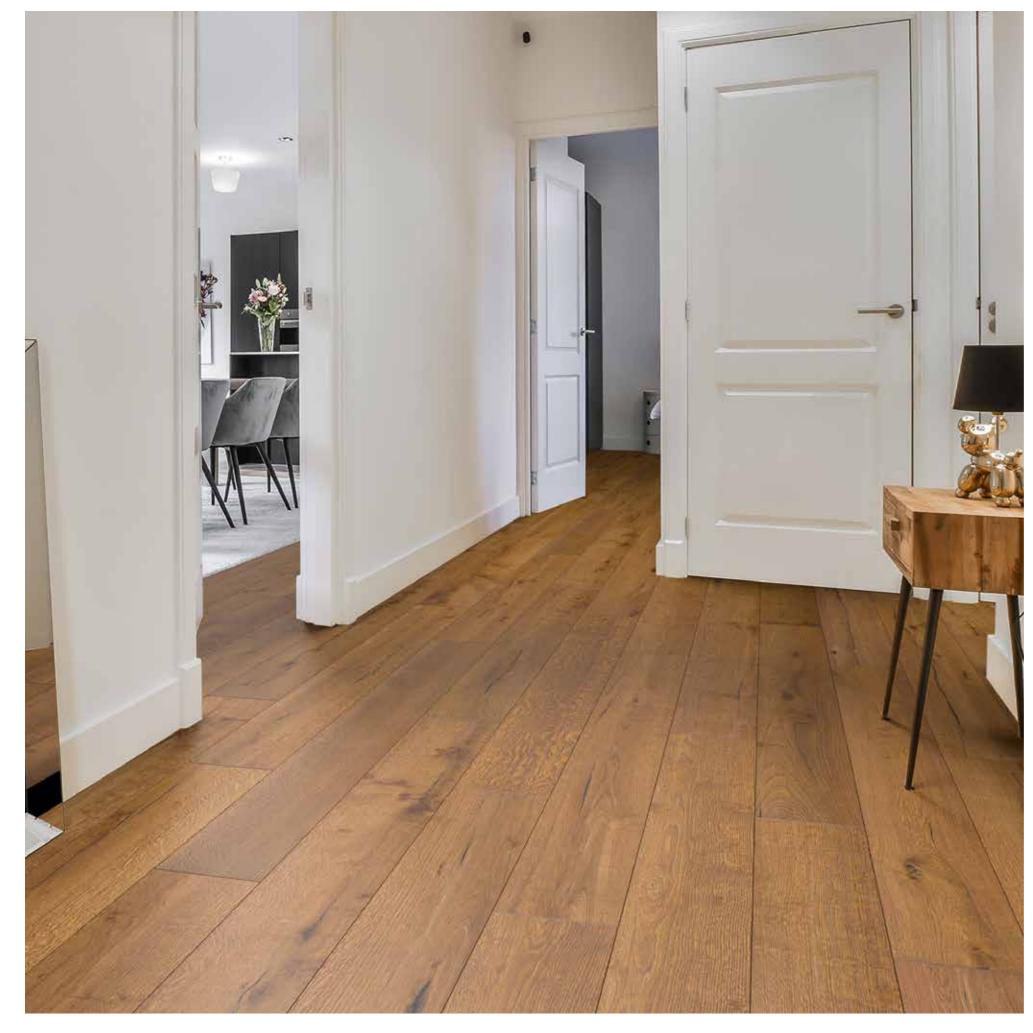




Wild Agar

Flanders Oak texture, 1210 x 192 x 5 mm



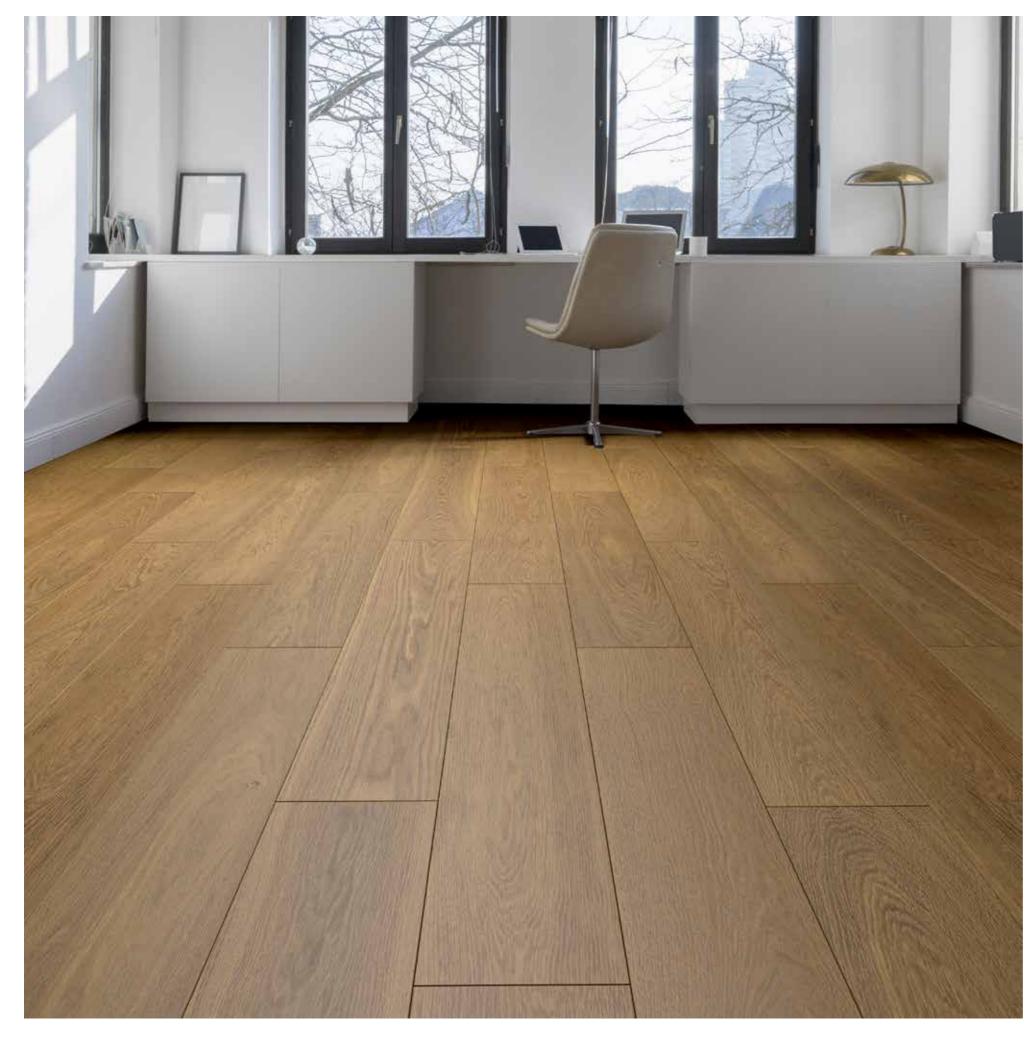




R076

Bourbon Cask

Stone Oak texture, **1210 x 192 x 5** mm



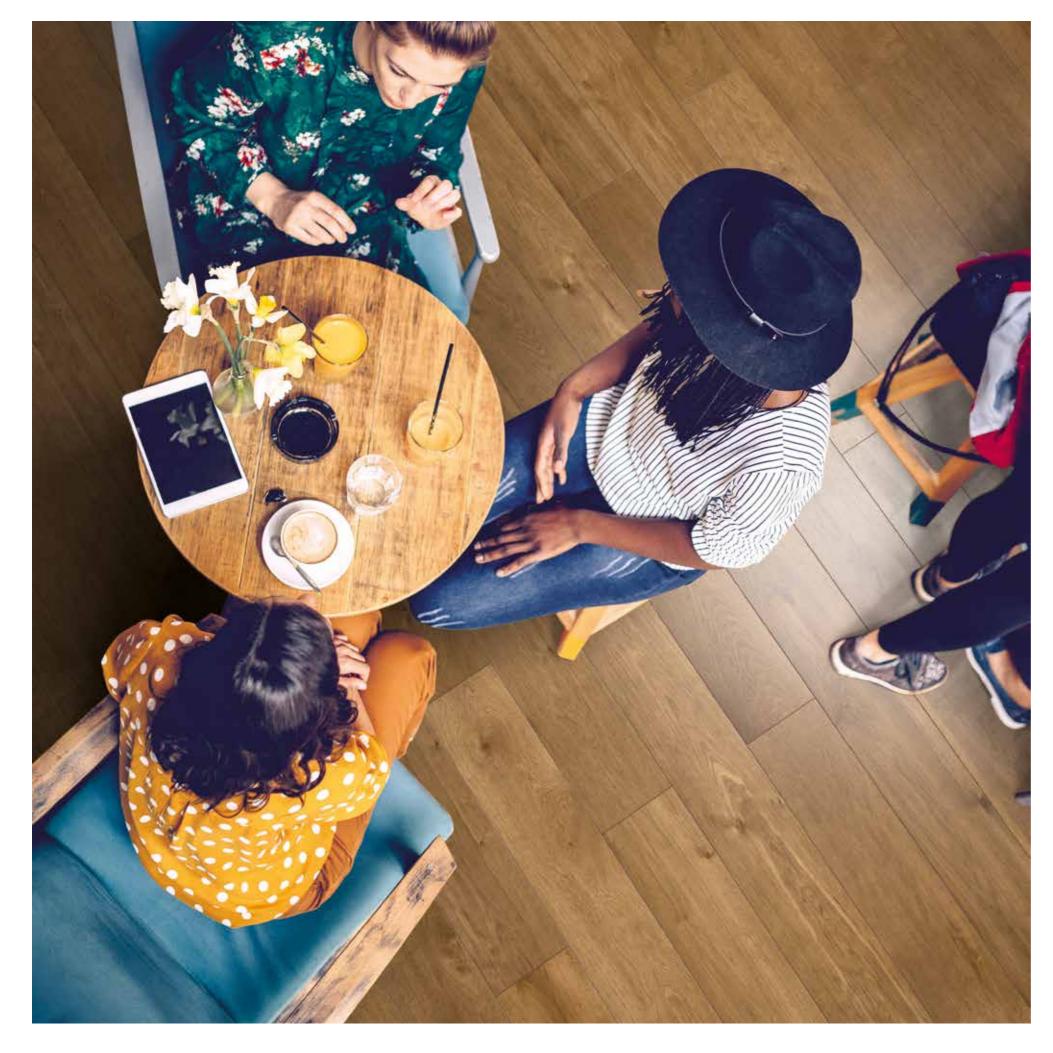

Humidor

Stone Oak texture, **1210 x 192 x 5** mm








Stone Oak texture, **1210 x 192 x 5** mm



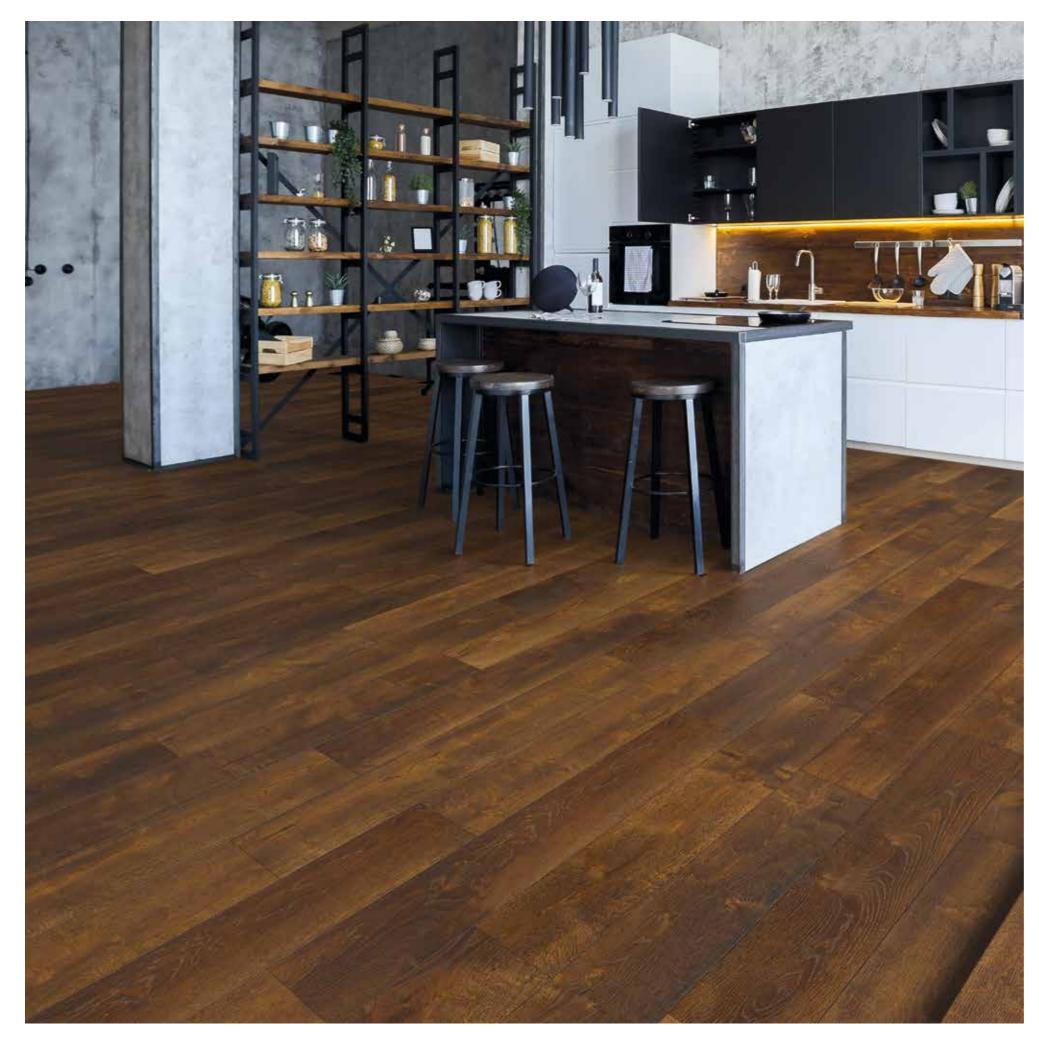





SKIRTINGS ACCESSORIES INSTALLATION



Rocko waterproof skirting boards



Article	Decor	Item No.	Description	Packing Unit	Suitable for		
К58С	R079	SK58C-R079	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R129	R109	g Tourn
K58C	R077	SK58C-R077	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R125	R077	g I I I I I I I I I I I I I I I I I I I
K58C	R128	SK58C-R128	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R128	R172	S S S S S S S S S S S S S S S S S S S
K58C	R123	SK58C-R123	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R123		g I
К58С	R124	SK58C-R124	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R124	R149	\$ \ \ \ \ \ \ \ \ \ \ \ \ \
K58C	Z212	SK58C-Z212	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R150		g Town
K58C	R066	SK58C-R066	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R066	R174	g Tourn
K58C	Z215	SK58C-Z215	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R148		# 1
K58C	R078	SK58C-R078	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R078		E De la companya de l
K58C	R065	SK58C-R065	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R065		\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
K58C	R073	SK58C-R073	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R073		
К58С	R081	SK58C-R081	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R081	R173	g of the same of t

Article	Decor	Item No.	Description	Packing Unit	Suitable for		
K58C	R076	SK58C-R076	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R076		
K58C	R082	SK58C-R082	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R082		5 N N N N N N N N N N N N N N N N N N N
K58C	R090	SK58C-R090	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R090		(S) 13 mm
K58C	R070	SK58C-R070	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R070		8 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
K58C	R133	SK58C-R133	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	R171		S S S S S S S S S S S S S S S S S S S
K58C	White	SK58C-9002	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	White suitable for all decors		S S States
K58C	Grey	SK58C-0171	2400 x 18 x 58 mm	10 pc/box = 24 rm/box 20 box/pallet	Grey suitable for all decors		u de la companya de l
K80	White	SK80C-9002	2400 x 14 x 80 mm	10 pc/box = 24 rm/box 20 box/pallet	White suitable for all decors	NEW	E Meson







resistant









Adhesive installation

__ 66 __

Accessories

Article Illustration Item No. Description Packing Unit

Tapping block



SCHLAGKLOTZ

168/90x70x20mm

Box of 20 pieces

Installation clips for skirtings



K5M

Box of 30 pieces

Rocko cleaning agent



PLYN-ROCKO-FLOORING Cleaning agent removes dirt or greasy residues.

800 ml

Underlay PUR 1.0 Rocko



PUR1.0_SPC

Acoustic underlay, 1 mm, specifically for floating flooring, Ideal for underfloor heating (Thermal Resistance 0,01m²K/W), walking sound reduction 13%, CS>530kPa.

10 m²/1roll 54 rolls/pallet

ROCKO Tiles by Kronospan




WATERPROOF TILES







Installation Rocko Flooring with $\boldsymbol{Perfect} Pad^{\boldsymbol{e}}$

Installation Rocko Flooring

















































€ 48h 15-30°C × 15-30°C





































































































































More information:











www.rocko-spc.com





www.rocko-spc.com



104/2024/EN Product information in this brochure is correct at time of publication. The company has a policy of continuous product development and reserves the right to change any product specifications given in this brochure. Due to the variations in the printing process, colours in this brochure may be subject to deviation from the actual products.

Distributor: Kronoflooring Sp. z o.o. Producer:

Kronoflooring Sp. z o.o. 38-200 Jasło ul. Przemysłowa 10

39-300 Mielec ul. Wojska Polskiego 3 T +48 17 58 22 200 F +48 17 58 22 300 T +48 13 44 24 901 sales.jaslo@kronospan.pl